

POWERTEC 32lb Bag

BATCH MIXES FOR GEO-LOOP GROUTERS

TG Lite

Thermal Conductivity	TG Lite	PowerTEC	Water		Yield
			Btu/hr ft °F	50lb Bags	
0.79	4	1	60.0	29	70.4
0.88	3	1	45.0	21.25	53.4
1.00	2	1	33.0	15.25	39.2
1.07	2	1	32.0	14.75	38.2
1.14	2	1	31.0	14.25	37.2
1.20	2	1	30.0	13.75	36.4

TG Select


Thermal Conductivity	TG Select	PowerTEC	Water		Yield
			Btu/hr ft °F	50lb Bags	
1.40	3	2	49.5	23.5	59.7
1.50	3	2	47.1	22.25	57.6
1.60	3	2	45.0	21.25	55.5

WARNING: Mixes are **extremely** sensitive to water volumes. It is strongly recommended that you use a water meter with all PowerTEC mixes.



MEASUREMENT REFERENCE

Measure according to the figure below. Water is measured up from the weld line. **Power OFF the Geo-Loop Grouter before taking measurements inside the tank.**

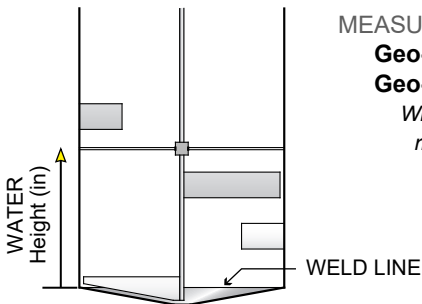

MEASUREMENTS FOR:

Geo-Loop 50-500

Geo-Loop 40-500

*With an 80 gal.
mixing tank.*

MIXING INSTRUCTIONS

STEP 1: Add Water.

STEP 2: Start mixer and add PowerTEC.

STEP 3: Add Thermal Grout and mix until uniform (approximately 2-3 minutes).

Contact GeoPro:

Phone: (877) 580-9348

Fax: (877) 580-9371

www.GeoProInc.com

Contact Geo-Loop:

Phone: (800) 580-5965

Fax: (712) 434-2115

www.Geo-Loop.com

© 2018 GeoPro, Inc.

TG Lite and TG Select are trademarks of GeoPro, Inc.

Geo-Loop Grouter is a trademark of Geo-Loop, Inc., Aurelia, Iowa

D2018-1